

NOTES:

1. ELECTRICAL

- 1.1 IMPEDANCE: 50 Ω
- 1.2 FREQUENCY RANGE: DC ~ 18 GHZ
- 1.3 VSWR: 1.30 MAX @ 18 GHZ
- 1.4 INSERTION LOSS: SEE TABLE 2 / "L"
- 1.5 RF LEAKAGE: N/A
- 1.6 INSULATION RESISTANCE: 1000 MΩ MIN
- 1.7 DIELECTRIC WITHSTANDING VOLTAGE: 500VRMS MIN AT SEA LEVEL

2. VOLTAAGE RATING: 335 VRMSMECHANICAL:

- 2.1 DURABILITY: ≥500 CYCLES
- 2.2 MINIMUM BENDING RADIUS(STATIC): 39 MM
- 2.3 MINIMUM BENDING RADIUS(REPEATED): 78 MM
- 2.4 BENDING STABILITY: +/-2° @ 18 GHZ(TYPICAL), +/-7° @ 18 GHZ(MAX)
- 2.5 CABLE RETENTION FORCE: 30 LBS MIN.
- 2.6 RECOMMENDED COUPLING TORQUE: 7-8 IN-LBS
- 2.7 COUPLING NUT RETENTION FORCE: ≥ 60 LBS

3. ENVIRONMENTAL:


TEMPERATURE RANGE: -55°C TO +165°C

4. MATERIAL AND FINISH: RAW CABLE,

- 4.01 JACKET: FEP, BLUE
- 4.02 FEATURES: LOW LOSS, FLEXIBLE CONNECTORS(BOTH ENDS),
- 4.03 BODY: STAINLESS STEEL, PASSIVATED
- 4.04 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4.05 CENTER CONTACT: BERYLLIUM COPPER, GOLD
- 4.06 DIELECTRIC: ENGINEERING PLASTIC, NATURAL

UNITS: MILLIMETERS[INCHES]

ASSEMBLY DRAWING

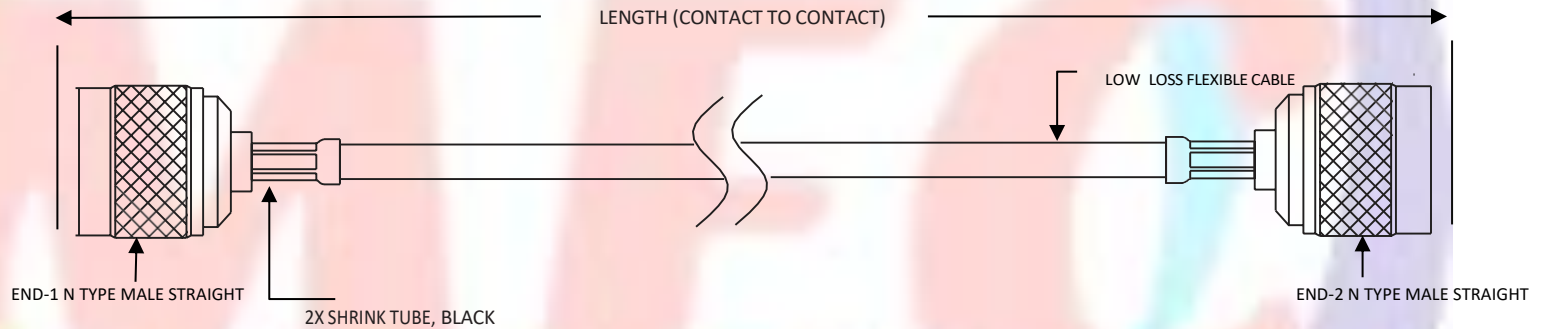

ONE LABEL POSITIONED IN THE MIDDLE, WHEN L1 < 1 METER
TWO LABELS POSITIONED AT BOTH ENDS, WHEN L1 ≥ 1 METER

OVERALL LENGTH: "L1"

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Attenuation (typical value@25°C & VSWR=1.0)											
Average power (typical value@40°C & atmospheric pressure)											
Frequency MHz	100	300	500	1000	2400	3000	4000	6000	10000	12400	18000
Att. dB/1 m	0.04	0.08	0.1	0.14	0.23	0.25	0.3	0.37	0.48	0.54	0.66
Avg. Power kW	5.817	3.341	2.579	1.812	1.156	1.030	0.887	0.717	0.547	0.488	0.399
					K1=	0.4563000					
					K2=	0.0003200					
Calculate Attenuation=K1* √ F.Mhz+K2 *F.MHz											
TABLE - 2 (Raw Attenuation)											

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. AND TOLERANCES ARE: DECIMALS ANGLES	<p style="text-align: center;"><u>PROPRIETARY NOTE</u></p> <p style="font-size: 8px;">THIS DOCUMENT CONTAINS THE CONFIDENTIAL INFORMATION AND PROPRIETARY TO MEC ELECTRONICS & COMMUNICATION PVT LTD. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN OBTAINED WRITTEN CONSENT FROM MEC.</p>	
X.X: 0.25 [.0100]	± 3°	
X.XX: 0.05 [.0020]		
X.XXX: 0.025 [.0010]		

MEC Electronics and Communication Pvt Ltd
RF Products
Connectors, Cable Assemblies, Adaptors & Customization
E-mail: info@mec.org.pk Website: www.mec.org.pk

DESC: N-Type Male Straight - N-type Male Straight Cable Assembly

PN: MEC-RFCA-201-N(MS)-N(MS)-1Meter

⊕
◁
** MS : MALE STRAIGHT
SHEET 1 OF 1