


ASSEMBLY DRAWING

NOTES:

- 1. ELECTRICAL:**
 - 1.1 IMPEDANCE: 50 Ω
 - 1.2 FREQUENCY RANGE: DC ~ 18 GHZ
 - 1.3 VSWR: 1.30 MAX @ 18 GHZ
 - 1.4 INSERTION LOSS: SEE TABLE 2 / "IL"
 - 1.5 RF LEAKAGE: ≥ 90 DB
 - 1.6 INSULATION RESISTANCE: 1200 MΩ MIN
 - 1.7 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
 - 1.8 VOLTAAGE RATING: 335 VRMS
- 2. MECHANICAL:**
 - 2.1 DURABILITY: ≥500 CYCLES
 - 2.2 MINIMUM BENDING RADIUS(STATIC): 52 MM
 - 2.3 MINIMUM BENDING RADIUS(REPEATED): 125 MM
 - 2.4 RECOMMENDED COUPLING TORQUE: 7-10 IN-LBS
 - 2.6 BENDING STABILITY: +/-5° @ 18 GHZ
 - 2.7 AMPLITUDE STABILITY: +/-0.1 @ 18 GHZ
- 3. ENVIRONMENTAL:**

TEMPERATURE RANGE: -40°C TO +85°C
- 4. MATERIAL AND FINISH:RAW CABLE,**
 - 4.01 AMROR: PTFE WIRE, BLACK+RED
 - 4.02 FEATURES: SUPER LOW LOSS, FLEXIBLECONNECTORS(BOTH ENDS),
 - 4.03 BODY: STAINLESS STEEL, PASSIVATED
 - 4.04 COUPLING NUT: STAINLESS STEEL, PASSIVATED
 - 4.05 CENTER CONTACT: BRASS, GOLD PLATED
 - 4.06 DIELECTRIC: ENGINEERING PLASTIC, NATURAL

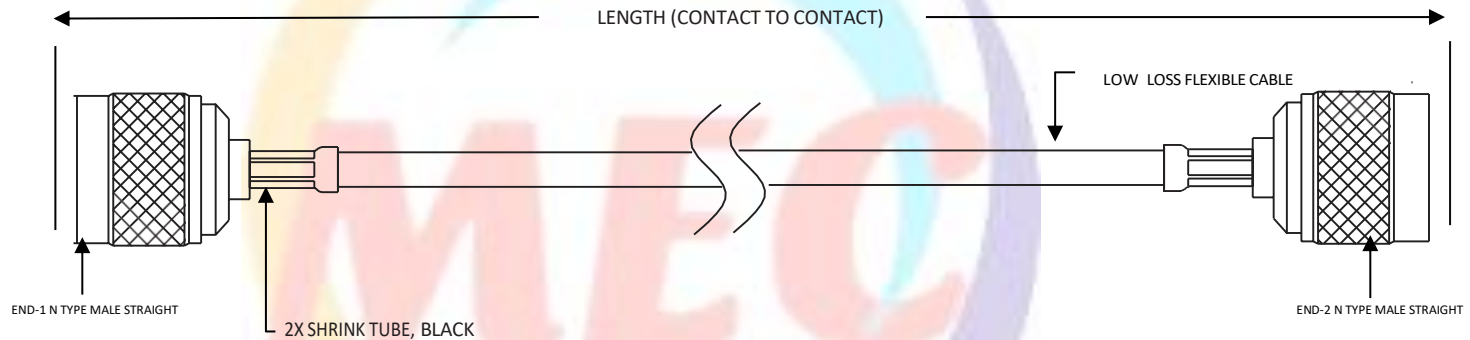

ONE LABEL POSITIONED IN THE MIDDLE, WHEN L1 < 1 METER
 TWO LABELS POSITIONED AT BOTH ENDS, WHEN L1 ≥ 1 METER

SMA Male Right Angle

OVERALL LENGTH: "L1"

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Attenuation (typical value@25°C & VSWR=1.0)

Average power (typical value@40°C & atmospheric pressure)

Frequency MHz	100	300	500	1000	2400	3000	4000	6000	10000	12400	18000
Att. dB/1 m	0.04	0.08	0.1	0.14	0.23	0.25	0.3	0.37	0.48	0.54	0.66
Avg. Power kW	5.817	3.341	2.579	1.812	1.156	1.030	0.887	0.717	0.547	0.488	0.399
				K1=	0.4563000						
				K2=	0.0003200						
	Calculate Attenuation=K1* √ F.MHz+K2 *F.MHz										

TABLE - 2 (Raw Attenuation)

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN MILLIMETERS. AND
 TOLERANCES ARE: DECIMALS ANGLES
 X.X: 0.25 [.0100] ± 3°
 X.XX: 0.05 [.0020]
 X.XXX: 0.025 [.0010]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS THE CONFIDENTIAL INFORMATION AND PROPRIETARY TO MEC ELECTRONICS & COMMUNICATION PVT LTD. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN OBTAINED WRITTEN CONSENT FROM MEC.



MEC Electronics and Communication Pvt Ltd
 RF Products
 Connectors, Cable Assemblies, Adaptors & Customization
 E-mail: info@mec.org.pk Website: www.mec.org.pk

DESC: N-Type Male Straight - N-type Male Straight Cable Assembly

PN: MEC-RFCA-201-N(MS)-N(MS)-1Meter-A