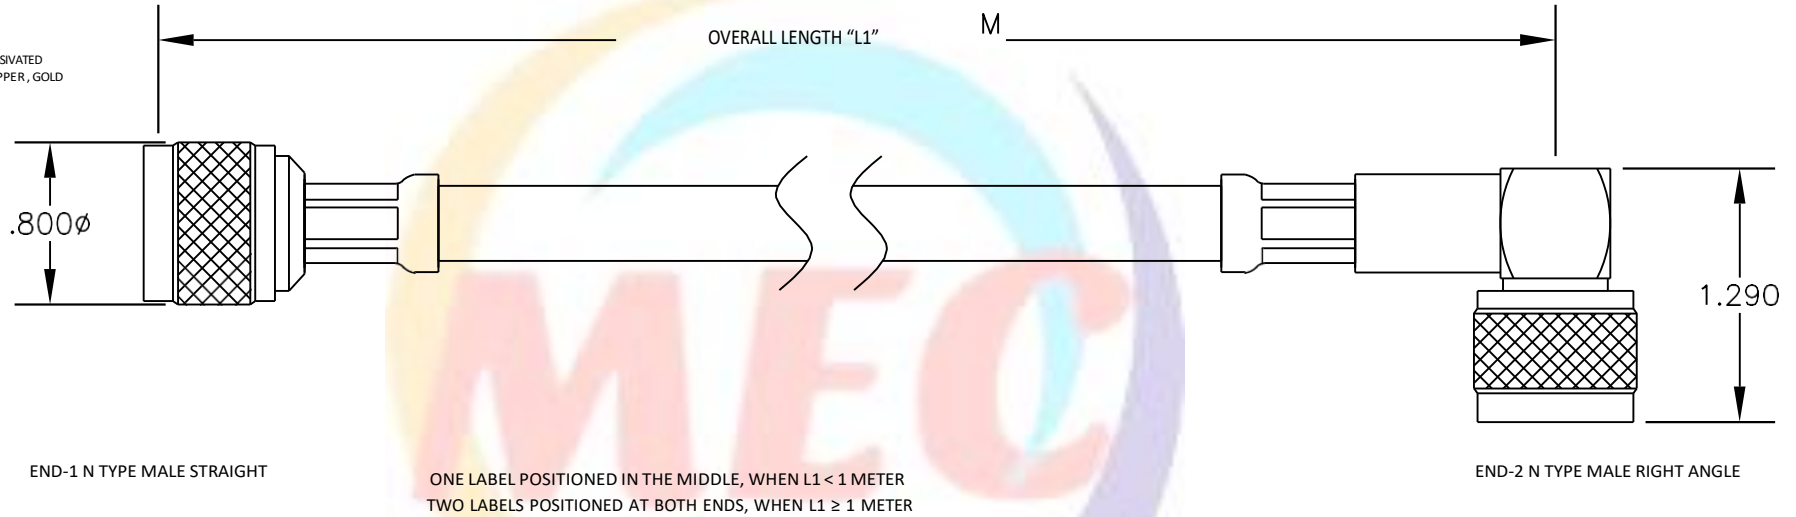


- NOTES:
- 1. ELECTRICAL**
- 1.1 IMPEDANCE: 50 Ω
 - 1.2 FREQUENCY RANGE: DC ~ 18 GHz
 - 1.3 VSWR: 1.30 MAX @ 18 GHz
 - 1.4 INSERTION LOSS: SEE TABLE 2 / "IL"
 - 1.5 RF LEAKAGE: N/A
 - 1.6 INSULATION RESISTANCE: 1000 MΩ MIN
 - 1.7 DIELECTRIC WITHSTANDING VOLTAGE: 500VRMS MIN AT SEA LEVEL
- 2. VOLTAGE RATING: 335 VRMS**
- MECHANICAL:**
- 2.1 DURABILITY: 2500 CYCLES
 - 2.2 MINIMUM BENDING RADIUS(STATIC): 39 MM
 - 2.3 MINIMUM BENDING RADIUS(REPEATED): 78 MM
 - 2.4 BENDING STABILITY: +/-2" @ 18 GHz(TYPICAL), +/-7" @ 18 GHz(MAX)
 - 2.5 CABLE RETENTION FORCE: 30 LBS MIN.
 - 2.6 RECOMMENDED COUPLING TORQUE: 7-8 IN-LBS
 - 2.7 COUPLING NUT RETENTION FORCE: ≥ 60 LBS
- 3. ENVIRONMENTAL:**
- TEMPERATURE RANGE: -55°C TO +165°C
- 4. MATERIAL AND FINISH:** RAW CABLE,
- 4.01 JACKET: FEP, BLUE
 - 4.02 FEATURES: LOW LOSS, FLEXIBLE CONNECTORS(BOTH ENDS),
 - 4.03 BODY: STAINLESS STEEL, PASSIVATED
 - 4.04 COUPLING NUT: STAINLESS STEEL, PASSIVATED
 - 4.05 CENTER CONTACT: BERYLLIUM COPPER, GOLD
 - 4.06 DIELECTRIC: ENGINEERING PLASTIC,

UNITS: MILLIMETERS[INCHES]

ASSEMBLY DRAWING



CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

| Attenuation (typical value@25°C & VSWR=1.0) | | | | | | | | | | | |
|---|-------|-------|-------|---|-----------|-------|-------|-------|-------|-------|-------|
| Average power (typical value@40°C & atmospheric pressure) | | | | | | | | | | | |
| Frequency MHz | 100 | 300 | 500 | 1000 | 2400 | 3000 | 4000 | 6000 | 10000 | 12400 | 18000 |
| Att. dB/1 m | 0.04 | 0.08 | 0.1 | 0.14 | 0.23 | 0.25 | 0.3 | 0.37 | 0.48 | 0.54 | 0.66 |
| Avg. Power kW | 5.817 | 3.341 | 2.579 | 1.812 | 1.156 | 1.030 | 0.887 | 0.717 | 0.547 | 0.488 | 0.399 |
| | | | | K1= | 0.4563000 | | | | | | |
| | | | | K2= | 0.0003200 | | | | | | |
| | | | | Calculate Attenuation=K1 * √ F.MHz+K2 * F.MHz | | | | | | | |



TABLE - 2 (Raw Attenuation)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS. AND
TOLERANCES ARE: DECIMALS ANGLES
X.X: Q25 [.0100] ± 3°
X.XX: Q05 [.0020]
X.XXX: Q025 [.0010]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS THE CONFIDENTIAL INFORMATION AND PROPRIETARY TO MEC ELECTRONICS & COMMUNICATION PVT LTD. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN OBTAINED WRITTEN CONSENT FROM MEC.



MEC Electronics and Communication Pvt Ltd
RF Products
Connectors, Cable Assemblies, Adaptors & Customization
E-mail: info@mec.org.pk Website: www.mec.org.pk

| | |
|-------|---|
| DESC: | N-Type Male Straight - N-Type Male Right Angle Cable Assembly |
| PN: | MEC-RFCA-201-N(MS)-N(MRA)-1Meter |
| |  ** MRA : MALE RIGHT ANGLE  **MS : MALE STRAIGHT |