
DATASHEET RF CABLE ASSEMBLY

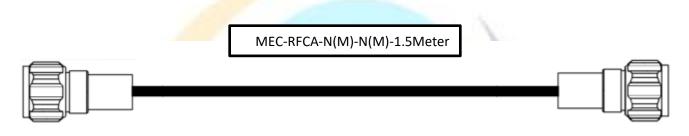

END 1: N-TYPE MALE STRAIGHT

END 2: N-TYPE MALE STRAIGHT

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Electrical Specifications						PROPRIETARY NOTE THIS DOCUMENT CONTAINS THE CONFIDENTIAL INFORMATION AND PROPRIETARY TO MEC ELECTRONICS & COMMUNICATION PVT LTD. AND	RF Products Connectors, Cable Assemblies, Adaptors & Customization		
Frequency GHz	3	6	8	12.4	18	SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMEN OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THA	теминеска други		
RAW CABLE ATTENU. : DB/M	0.27	0.38	0.44	0.56	0.69	OBTAINED WRITTEN CONSENT FROM MEC. DESC: N-Type Male Straight to N-Type Male Straight RF Cable Assembly			
COMPLETE CABLE ASSEMBLY LOSS	0.405	0.57	0.66	0.84	1.035				
Characteristic Impedance	50 Ω					P/N: MEC-RFCA-N(M)-N(M)-1.5Meter			
						⊕ ⊖	** MRA : MALE RIGHT ANGLE **MS : MALE STRAIGHT	SHEET 1 OF 1	