
DATASHEET RF CABLE ASSEMBLY

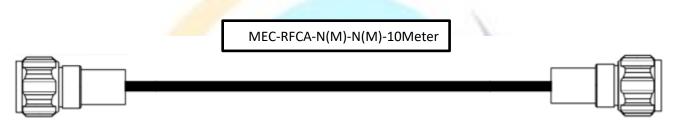

END 1: N-TYPE MALE STRAIGHT

END 2: N-TYPE MALE STRAIGHT

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Electrical Specifications						PROPRIETARY NOTE THIS DOCUMENT CONTAINS THE CONFIDENTIAL INFORMATION AND PROPRIETARY TO MEC ELECTRONICS & COMMUNICATION PVT LTD. AND	RE Products	
Frequency GHz	3	6	8	12.4	18	SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS E-mail: info@mec	E-mail: info@mec.org.pk Website: www.mec.org.pk	
RAW CABLE ATTENU. : DB/M	0.27	0.38	0.44	0.56	0.69	OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THA OBTAINED WRITTEN CONSENT FROM <i>MEC.</i>	N	
COMPLETE CABLE ASSEMBLY LOSS	2.7	3.8	4.4	5.6	6.9	DESC: N-Type Male Straight to N-Type Male Straight RF Cable Assembly		
Characteristic Impedance	50 Ω							
					P/N: MEC-RFCA-N(M)-N(M)-10Meter			
						⊕ ➡	** MRA : MALE RIGHT ANGLE **MS : MALE STRAIGHT SHEET 1 OF 1	